NOTICE: UNLESS OTHERWISE STATED THE FOLLOWING APPLIES

SHARP EDGES REMOVED	GENERAL TOL. ACCORDING TO	ISO 2768-1/m	ISO 2768-2/K	M-THREAD 6H/6g - ISO 965 U-THREAD 2A/2B - ISO B1.1

LENGTH									
	DEVIATION		± 0.1	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	TOLERANCES FOR OUTSIDE DIAMETER h11
	NOM MEAS. MENT	LOW	(0)	3	6	30	120	400	TOLERANCES FOR INSIDE DIAMETER H11
		UPPR	3	6	30	120	400	1000	

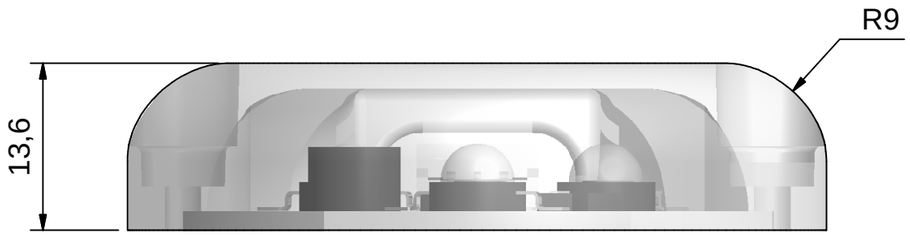

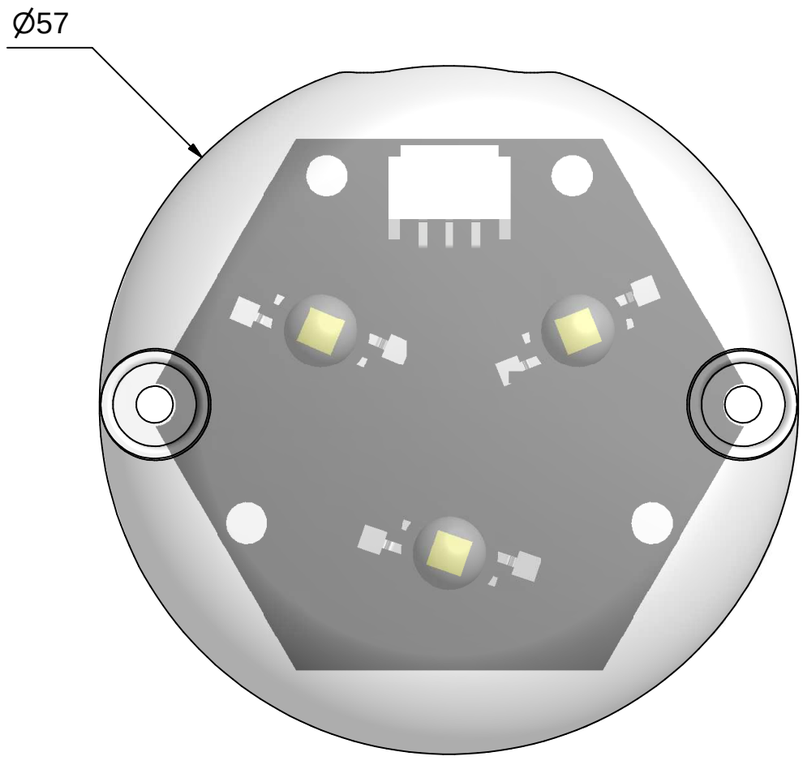

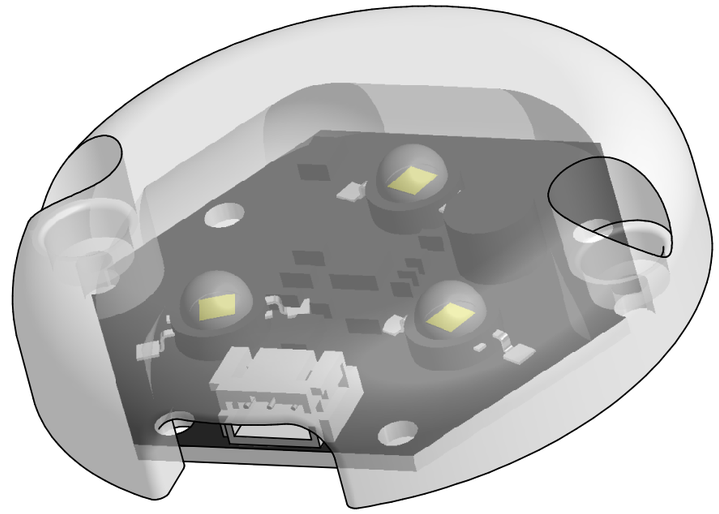

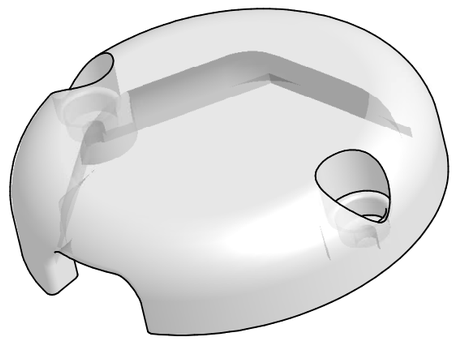

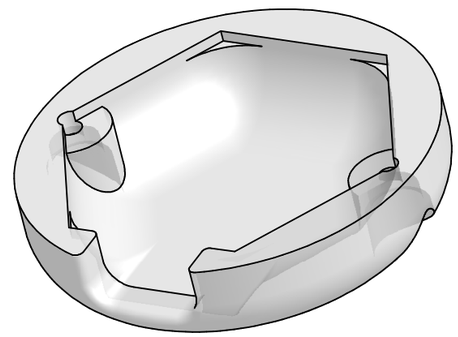

MATERIAL: PMMA						SCALE	DATE: 101014
SURFACE TREATMENT						COLOUR	
DESIGN: EM	DRAWN: EM	CHECKED	APPROVED	REPLACES	CAD: Inventor	PART OF	
E	Clara Cover					PR-INQ.: A10-076	SHEET: 1 / 1
REV	1	3	5	7		STATUS: A - ONLY FOR PRICE INQUIRY B - ONLY FOR PRODUCTION OF TOOLING AND SAMPLES P - APPROVED FOR PRODUCTION	
	2	4	6	8		STATUS/REV.: A	DRAW / ITEM NO.: 468223

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

SWEDEN
Phone +46-589-490 950
Fax +46-589-197 80

opto drive TM